

Overview



SITRANS LR260 is a 2-wire 25 GHz pulse radar level transmitter for continuous monitoring of solids and liquids in storage vessels including extreme levels of dust and high temperatures, to a range of 30 m (98.4 ft).

Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- 25 GHz high frequency allows for small horn antennas mounted easily in nozzles
- Communication using HART or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or SIMATIC PDM

Application

SITRANS LR260 includes a graphical local user interface (LUI) that improves setup and operation using an intuitive Quick Start Wizard, and echo profile displays for diagnostic support. Start-up is easy using the Quick Start wizard with a few parameters required for basic operation.


SITRANS LR260's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid.

SITRANS LR260 measures virtually any solids material to a range of 30 m (98.4 ft).


- Key Applications: cement powder, plastic powder/pellets, grain, flour, coal, solids and liquids bulk storage vessels, and other applications.

Configuration


Mounting on a nozzle

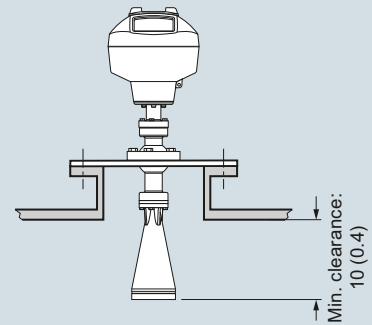

Installation

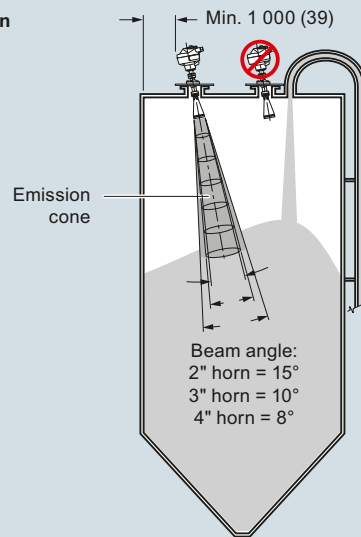

Positioning with easy Aimer

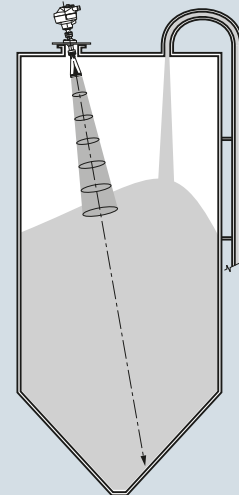

SITRANS LR260 installation, dimensions in mm (inch)

Level Measurement

Continuous level measurement – Radar transmitters

SITRANS LR260

Technical specifications

| | | | |
|---|---|--|--|
| Mode of operation | | Design | |
| Measuring principle | Pulse radar level measurement | Enclosure | Aluminum, polyester powder-coated |
| Frequency | K-band (25.0 GHz) | • Construction | 2 x M20x1.5 or 2 x 1/2" NPT |
| Minimum detectable distance | 0.05 m (2 inch) from end of horn | • Conduit entry | Type 4X/NEMA 4X, Type 6/ NEMA 6, IP67, IP68 |
| Maximum measuring range ¹⁾ | | Degree of protection | < 8.14 kg (17.9 lb) including 4" flange and standard Easy Aimer with 4" horn antenna |
| • Solids | <ul style="list-style-type: none"> • 2" horn: 10 m (32.8 ft) • 3" horn: 20 m (65.6 ft) • 4" horn: 30 m (98.4 ft) | Weight | Graphic LCD, with bar graph representing level |
| • Liquids | <ul style="list-style-type: none"> • 2" horn: 20 m (65.6 ft) • 3" horn: 30 m (98.4 ft) • 4" horn: 30 m (98.4 ft) | Display (local) | Flange and horn (easy aimer model) |
| Output - HART | | • Material | 304 stainless steel |
| Power | • 4 ... 20 mA (\pm 0.02 mA accuracy) | • Horn antenna | 2" horn |
| Fail signal | • Nominal 24 V DC (max. 30 V DC) | | 3" horn |
| Load | • 3.6 mA ... 23 mA; or last value 230 ... 600 Ω | | 4" horn |
| Output - PROFIBUS PA | | Process connections | |
| | <ul style="list-style-type: none"> • Per IEC 61158-2 • 15.0 mA • Profile version 3.01, Class B | • Universal flanges ²⁾ | 2 inch/50 mm, 3 inch/80 mm, 4 inch/100 mm, 6 inch/150 mm |
| Performance (according to reference conditions IEC60770-1) | | Mechanical (Threaded Connection model) | |
| Maximum measured error (including hysteresis and non-repeatability) | <ul style="list-style-type: none"> • 25 mm (1 inch) from minimum detectable distance to 300 mm (11.8 inch) • Remainder of range = 10 mm (0.39 inch) or 0.1 % of spa(whichever is greater) | • Threaded connection | 2" NPT (ASME B1.20.1), R (BSPT, EN 10226-1) or G (BSP, EN ISO 228-1) 316L/1.4404 or 316L/1.4435 stainless steel PTFE emitter |
| | | • Materials | |
| Rated operating conditions | | Certificates and approvals | |
| Installation conditions | | General | CSA _{US/C} , CE, FM |
| • Location | Indoor/outdoor | Radio | Europe (R&TTE), FCC, Industry Canada, RCM |
| Ambient conditions (enclosure) | | Hazardous | CSA/FM Class II, Div. 1, Groups E, F, G, Class III ATEX II 1D, 1/2D, 2D Ex ta IIIC T100 °C Da IECEX/ATEX II 1 GD Ex ia IIC T4 Ga, Ex ta IIIC T100 °C Da CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G SABS ARP0108 Ex ia IIC T4 Ga |
| • Ambient temperature | -40 ... +80 °C (-40 ... +176 °F) | | |
| • Installation category | I | | |
| • Pollution degree | 4 | | |
| Medium conditions | | Programming | |
| Dielectric constant ϵ_r | $\epsilon_r > 1.6$, antenna and application dependent | Intrinsically Safe Siemens handheld programmer | Infrared receiver IS model: ATEX II 1GD Ex ia IIC T4 Ga Ex iaD 20 T135 °C Ta = -20 ... +50 °C CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 Ta = 50 °C |
| Process temperature | -40 ... +200 °C (-40 ... +392 °F) | • Approvals for handheld programmer | |
| Process pressure | <ul style="list-style-type: none"> • 0.5 bar g (7.25 psi g) maximum • 3 bar g (43.5 psi g) optional with 80 °C (176 °F) temperature max | Handheld communicator | HART communicator 375 |
| | | PC | SIMATIC PDM |
| | | Display (local) | Graphic local user interface including quick start wizard and echo profile displays |

¹⁾ From sensor reference point

²⁾ Universal flange mates with EN 1092-1 (PN 16)/ASME B16.5 (150 lb)/JIS 2220 (10K) bolt hole pattern

| Selection and Ordering data | Article No. | Selection and Ordering data | Order code |
|--|----------------------------|---|--------------------------|
| SITRANS LR260 2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of solids to a range of 30 m (98.4 ft). | 7ML5427- 0 0 0 - | Further designs Please add "-Z" to Article No. and specify Order code(s). | |
| Order handheld programmer separately Click on the Article No. for the online configuration in the PIA Life Cycle Portal. | | Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text | Y15 |
| Process connection Universal flat faced flange fits ANSI/DIN/JIS flanges, Easy Aimer with integral (Easy Aimer ball) | | Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 Inspection Certificate Type 3.1 per EN 10204 ⁴⁾ | C11 C12 |
| 2 inch/50 mm | A | Operating Instructions for HART/mA device | Article No. |
| 3 inch/80 mm | B | English | 7ML1998-5KE03 |
| 4 inch/100 mm | C | German | A5E34942821 |
| 6 inch/150 mm | D | Note: The Operating Instructions should be ordered as a separate line item on the order. Multi-language Quick Start manual | A5E32106122 |
| Threaded connection | | This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library. | |
| 2" NPT (ASME B1.20.1) (tapered thread) ¹⁾²⁾⁵⁾ | E | Operating Instructions for PROFIBUS PA device | Article No. |
| R 2" [(BSPT), EN 10226-1] (tapered thread) ¹⁾²⁾⁵⁾ | F | English | 7ML1998-5KF03 |
| G 2" [(BSPT), EN ISO 228-1] (parallel thread) ¹⁾²⁾⁵⁾ | G | German | A5E34957877 |
| | | Note: The Operating Instructions should be ordered as a separate line item on the order. Multi-language Quick Start manual | A5E32114443 |
| | | This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library. | |
| Antenna | | Accessories | |
| 2" Horn antenna, fits 50 mm or 2" nozzles ¹⁾ | A | One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART | 7ML1930-1AP |
| 2" Horn antenna with 100 mm extension ¹⁾ | B | One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA | 7ML1930-1AQ |
| 2" Horn antenna with 200 mm extension ¹⁾ | C | Handheld programmer, Infrared, Intrinsically Safe | 7ML1930-1BK |
| 2" Horn antenna with 500 mm extension ¹⁾²⁾ | D | Dust cap, PTFE, for 2 inch/50 mm horn | 7ML1930-1DE |
| 2" Horn antenna with 1 000 mm extension ¹⁾²⁾ | E | Dust cap, PTFE, for 3 inch/75 mm horn | 7ML1930-1BL |
| 3" Horn antenna, fits 80 mm or 3" nozzles ³⁾ | F | Dust cap, PTFE, for 4 inch/100 mm horn | 7ML1930-1BM |
| 3" Horn antenna with 100 mm extension ³⁾ | G | HART modem/USB (for use with a PC and SIMATIC PDM) | 7MF4997-1DB |
| 3" Horn antenna with 200 mm extension ³⁾ | H | SITRANS RD100, loop powered display - see Chapter 7 | 7ML5741-... |
| 3" Horn antenna with 500 mm extension ²⁾³⁾ | J | SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 | 7ML5740-... |
| 3" Horn antenna with 1 000 mm extension ²⁾³⁾ | K | SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 | 7ML5744-... |
| 4" Horn antenna, fits 100 mm or 4" nozzles | L | SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7 | 7ML5750-... |
| 4" Horn antenna with 100 mm extension | M | For applicable back up point level switch - see point level measurement section | |
| 4" Horn antenna with 200 mm extension | N | Note: Products shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended. | |
| 4" Horn antenna with 500 mm extension ²⁾ | P | | |
| 4" Horn antenna with 1 000 mm extension ²⁾ | Q | | |
| Purge (self cleaning) connection | | | |
| No purge connection | 0 | | |
| Purge connection | 1 | | |
| Output/communication | | | |
| 4 ... 20 mA, HART | 0 | | |
| PROFIBUS PA | 1 | | |
| Cable inlet | | | |
| 2 x M20x1.5 | A | | |
| 2 x 1/2" NPT | B | | |
| Note: Polymeric cable glands will be provided with M20 devices. | | | |
| Approvals | | | |
| General purpose, CSA US/CS, FM, Industry Canada, FCC, CE, R&TTE, RCM | A | | |
| CSA/FM Class II, Div. I, Groups E, F, G, Class III, Industry Canada, FCC, RCM | B | | |
| ATEX II 1D, 1/2D, 2D Ex ta IIIC T100 °C Da, CE, R&TTE, RCM, INMETRO | C | | |
| Non-incendive, CSA/FM Class I, Div. 2, Groups A, B, C, D, Industry Canada, FCC, RCM | D | | |
| Intrinsically safe, IECEx/ATEX II 1 GD Ex ia IIC T4 Ga, Ex ta IIIC T100 °C Da, R&TTE, RCM | E | | |
| Intrinsically safe, CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada, FCC, RCM | F | | |
| Intrinsically safe, South Africa ARP0108 Ex ia IIC T4 Ga | G | | |
| Pressure rating | | | |
| Rating per Pressure/Temperature curves in manual ⁶⁾ | 0 | | |
| 0.5 bar g (7.25 psi g) maximum | 1 | | |

1) Maximum measurement range 10 m (32.8 ft) solids or 20m (65.6ft) liquids

2) Available with Purge option 0 only

3) Maximum measurement range 20 m (65.6 ft) solids or 30m (98.4ft) liquids

4) Available with pressure option 0 only

5) Available with Antenna Options A, B, F, G, L, and M only


6) Available with pressure option 0 only

Level Measurement

Continuous level measurement – Radar transmitters


SITRANS LR260

Characteristic curves

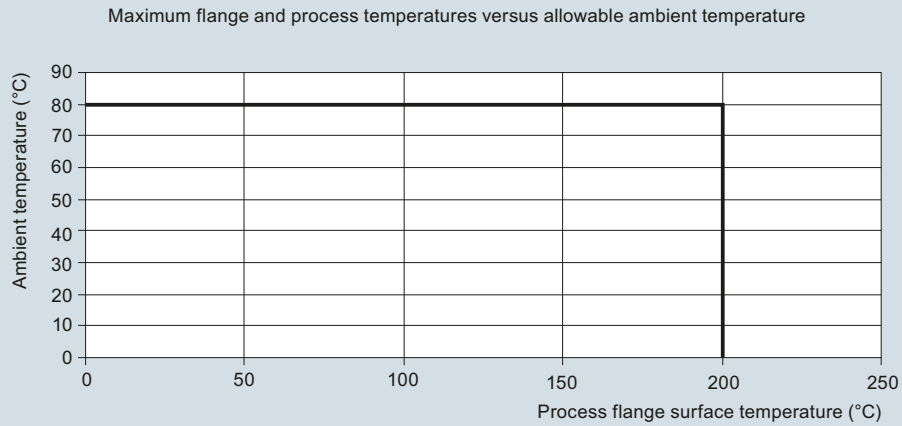


SITRANS LR260 Ambient/Process Flange Surface Temperature Curve

Dimensional drawings

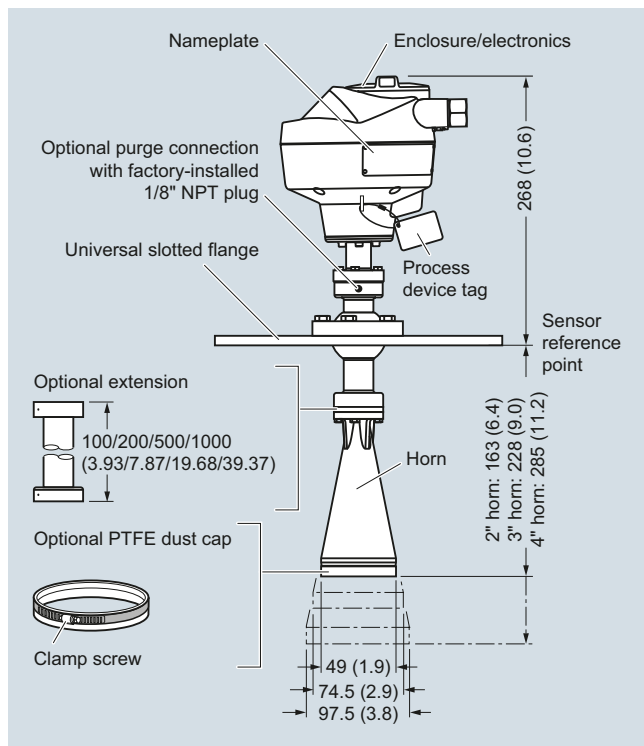

SITRANS LR260, dimensions in mm (inch)


SITRANS LR260

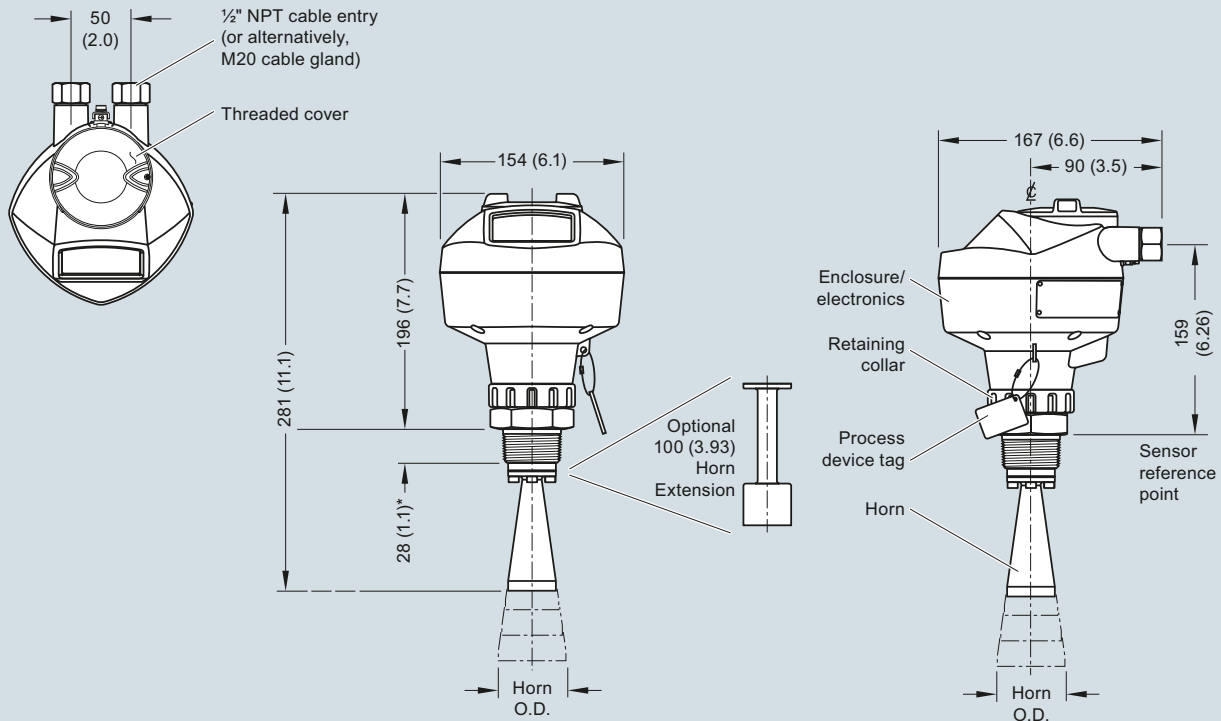

| Antenna Type | Antenna O.D. | Height to sensor reference point | | | Beam angle | Measurement range |
|--------------|--------------|----------------------------------|------------------------|------------------------|------------|-------------------|
| | | 1-1/2" threaded connection | 2" threaded connection | 3" threaded connection | | |
| 2" horn | 47.8 (1.88) | N/A | 166 (6.55) | 180 (7.09) | 15 degrees | 20 m (65.6 ft) |
| 3" horn | 74.8 (2.94) | N/A | 199 (7.85) | 213 (8.39) | 10 degrees | 20 m (65.6 ft) |
| 4" horn | 94.8 (3.73) | N/A | 254 (10) | 268 (10.55) | 8 degrees | 20 m (65.6 ft) |

SITRANS LR260, dimensions in mm (inch)

Schematics

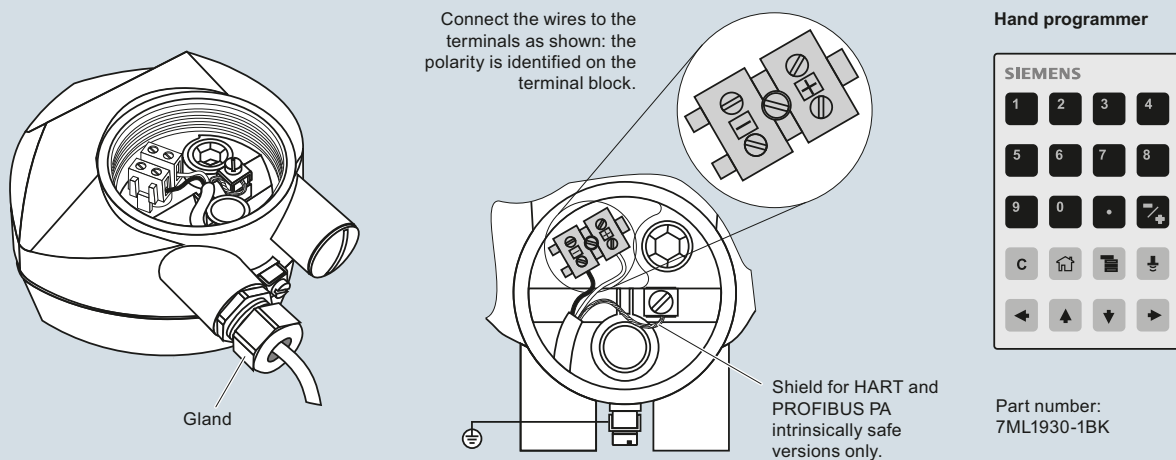


Notes:


1. DC terminal shall be supplied from a source providing electrical isolation between the input and output, to meet the applicable safety requirements of IEC 61010-1.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 ... 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

Selection and ordering data

SITRANS LR260/LR460 Specials

| | Article No. |
|---|--------------------|
| Process connection part kits - non-pressure-rated | |
| LR260/LR460, 100 mm extension for horn antenna, no purge ¹⁾ | A5E01087872 |
| LR260/LR460, 200 mm extension for horn antenna, no purge ¹⁾ | A5E01091262 |
| LR260/LR460, 100 mm extension for horn antenna with purge ¹⁾ | A5E01261979 |
| LR260/LR460, 200 mm extension for horn antenna with purge ¹⁾ | A5E01261981 |
| LR260/LR460, horn 2", no purge, no emitter ¹⁾ | A5E02083905 |
| LR260/LR460, horn 3", no purge, no emitter ¹⁾ | A5E01623511 |
| LR260/LR460, horn 4", no purge, no emitter ¹⁾ | A5E01623512 |
| LR260/LR460, horn 2", with purge, no emitter ¹⁾ | A5E02083906 |
| LR260/LR460, horn 3", with purge, no emitter ¹⁾ | A5E01623513 |
| LR260/LR460, horn 4", with purge, no emitter ¹⁾ | A5E01623514 |
| LR260/LR460, 3" universal flat faced flange ¹⁾ | A5E02303897 |
| LR260/LR460, 4" universal flat faced flange ¹⁾ | A5E01259467 |
| LR260/LR460, 6" universal flat faced flange ¹⁾ | A5E01261834 |
| LR260/LR460 O-Rings for Easy Aimer ¹⁾ | A5E01261836 |
| Kit, Emitter for LR260/LR460 ¹⁾ | A5E02360694 |
| LR260 lid with O-ring | A5E02465410 |
| Purge conversion kit – non-pressure-rated (no flange or extension included) | |
| LR260/LR460 purge conversion, 2" horn ¹⁾ | A5E02083914 |
| LR260/LR460 purge conversion, 3" horn ¹⁾ | A5E02083915 |
| LR260/LR460 purge conversion, 4" horn ¹⁾ | A5E02083916 |
| Enclosure with electronics | |
|  | |
| LR260 enclosure with board stack, HART communication, M20 cable inlet, approval option A, no process connection | A5E02203605 |
| LR260 enclosure with board stack, PROFIBUS PA communication, M20 cable inlet, approval option A, no process connection | A5E02213423 |
| LR260 enclosure with board stack, HART communication, NPT cable inlet, approval option A, no process connection | A5E02165924 |
| LR260 enclosure with board stack, PROFIBUS PA communication, NPT cable inlet, approval option A, no process connection | A5E02213428 |
| Sitrans LR260 enclosure with board stack, HART communication, NPT cable inlet, approval option D, no process connection | A5E03934184 |
| Sitrans LR260 enclosure with board stack, HART communication, M20 cable inlet, approval option E, no process connection | A5E03934187 |
| LR260 enclosure with board stack, HART communication, NPT cable inlet, approval option F, no process connection | A5E03934191 |
| LR260 enclosure with board stack, PROFIBUS PA communication, M20 cable inlet, approval option F, no process connection | A5E31820689 |

SITRANS LR260/LR460 Specials

| | Article No. |
|--|--------------------|
| Enclosure with electronics (LR460) | |
|  | |
| LR460 enclosure with board stack, HART communication, AC power, M20 cable inlet, approval option A, no process connection | A5E02182085 |
| LR460 enclosure with board stack, PROFIBUS PA communication, AC power, M20 cable inlet, approval option A, no process connection | A5E02212422 |
| LR460 enclosure with board stack, HART communication, AC power, NPT cable inlet, approval option A, no process connection | A5E02212423 |
| LR460 enclosure with board stack, PROFIBUS PA communication, AC power, NPT cable inlet, approval option A, no process connection | A5E02212424 |
| LR460 enclosure with board stack, HART communication, DC power, M20 cable inlet, approval option A, no process connection | A5E02212425 |
| LR460 enclosure with board stack, PROFIBUS PA communication, DC power, M20 cable inlet, approval option A, no process connection | A5E02212426 |
| LR460 enclosure with board stack, HART communication, DC power, NPT cable inlet, approval option A, no process connection | A5E02212428 |
| LR460 enclosure with board stack, PROFIBUS PA communication, DC power, NPT cable inlet, approval option A, no process connection | A5E02212429 |

¹⁾ Available with no pressure rating, 0.5 bar g maximum.
Please contact ceg.smpi@siemens.com for special requests.