


Level Measurement

Continuous level measurement – Radar transmitters

SITRANS Probe LR

Overview

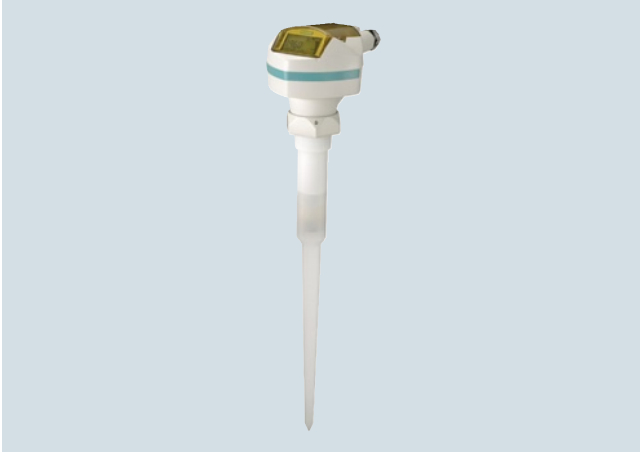

SITRANS Probe LR is a 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage vessels with nominal pressure and temperature, to a range of 20 m (66 ft).

Benefits

- Uni-Construction polypropylene rod antenna standard
- Easy installation and simple start-up
- Programming using infrared Intrinsically Safe handheld programmer, SIMATIC PDM or HART handheld communicator
- Communication using HART
- Process Intelligence signal processing
- Extremely high signal-to-noise ratio
- Auto False-Echo Suppression of false echoes

Application

The Probe LR is ideal for applications with chemical vapors, temperature gradients, vacuum or pressure, such as simple chemical storage or water treatment vessels. SITRANS Probe LR has a range of 0.3 to 20 m (1 to 65 ft).


Probe LR is designed for safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. It has a standard Uni-Construction polypropylene rod antenna that offers excellent chemical resistance and is hermetically sealed. The Uni-Construction antenna includes an internal, integrated shield that eliminates vessel nozzle interference.

SITRANS Probe LR incorporates Process Intelligence signal processing. The Probe LR also has a high signal-to-noise ratio leading to improved reliability.

Start-up is easy with as few as two parameters for basic operation. Programming is simple using SIMATIC PDM, HART handheld communicator or the Intrinsically Safe handheld programmer.

- Key Applications: chemical storage, wastewater wet well, and drilling mud

Configuration

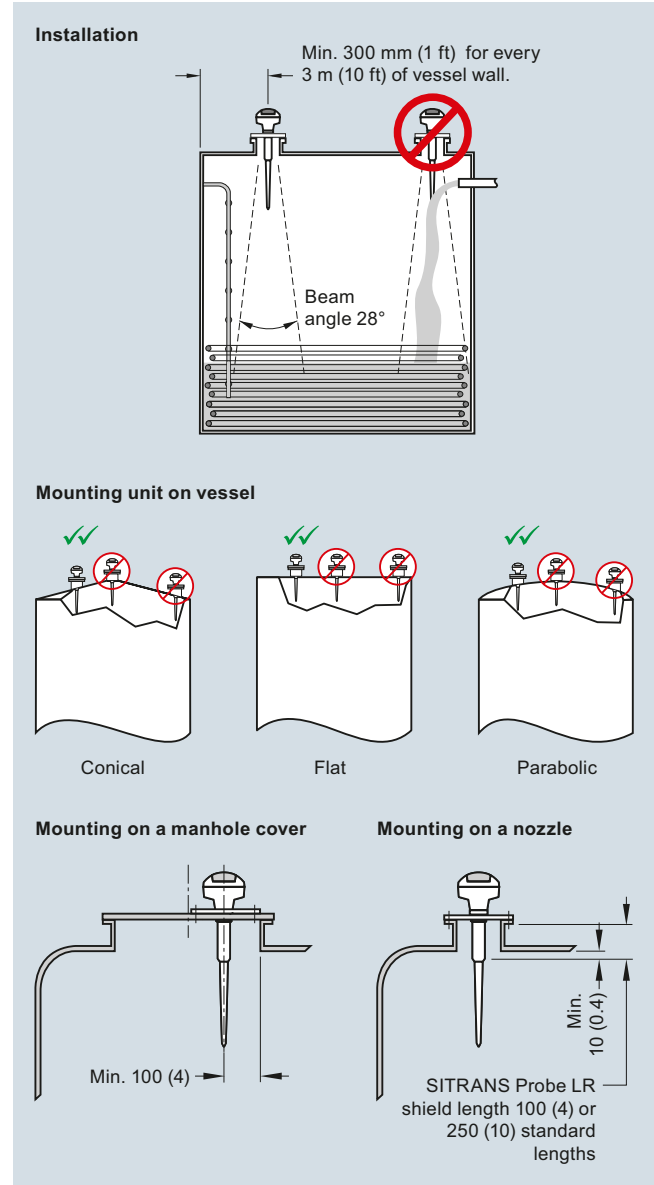

SITRANS Probe LR installation, dimensions in mm (inch)

Technical specifications

Mode of operation		Power supply	
Measuring principle	Pulse radar level measurement		<ul style="list-style-type: none"> Nominal 24 V DC with max. 550 Ω, maximum 30 V DC 4 ... 20 mA
Frequency	5.8 GHz (North America 6.3 GHz)	Certificates and approvals	
Measuring range	0.3 ... 20 m (1.0 ... 65 ft)	General	CSA _{US/CA} , CE, FM, RCM
Output		Marine	<ul style="list-style-type: none"> Lloyd's Register of Shipping ABS Type Approval
Analog output	4 ... 20 mA	Radio	FCC, Industry Canada and European (R&TTE), RCM
Accuracy	± 0.02 mA	Hazardous	
Span	Proportional or inversely proportional	<ul style="list-style-type: none"> Intrinsically Safe (Brazil) Intrinsically Safe (Canada) 	<ul style="list-style-type: none"> INMETRO Ex ia IIC T4 Ga CSA Class I, Div.1, Groups A,B,C,D; Class II, Div. 1, Group G; Class III ATEX II 1G EEx ia IIC T4 IECEX Ex ia IIC T4 GOST-R Ex ia FM Class I, Div.1, Groups A,B,C,D; Class II, Div. 1, Groups E,F, G; Class III
Communications	HART	<ul style="list-style-type: none"> Intrinsically Safe (Europe) Intrinsically Safe (International) Intrinsically Safe (Russia) Intrinsically Safe (USA) 	
Performance (reference conditions)		Programming	
Accuracy	± the greater of 0.1 % of range or 10 mm (0.4 inch)	Handheld programmer	HART communicator 375
Influence of ambient temperature	0.003 %/K	PC	SIMATIC PDM
Repeatability	± 5 mm (2 inch)	Intrinsically safe Siemens handheld programmer (optional)	Infrared receiver
Fail-safe	mA signal programmable as high, low or hold (LOE)	<ul style="list-style-type: none"> Approvals (handheld programmer) 	<ul style="list-style-type: none"> ATEX II 1G EEx ia IIC T4 CSA and FM Class I, Div. 1, Groups A,B,C,D, T6 at max. ambient
Rated operating conditions		Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages
Installation conditions			
<ul style="list-style-type: none"> Location 	Indoor/outdoor		
Ambient conditions (enclosure)			
<ul style="list-style-type: none"> Ambient temperature Installation category Pollution degree 	-40 ... +80 °C (-40 ... +176 °F) I 4		
Medium conditions			
Dielectric constant ϵ_r	$\epsilon_r > 1.6$ (for $\epsilon_r < 3$, use stillpipe)		
Vessel temperature	-40 ... +80 °C (-40 ... +176 °F)		
Vessel pressure	3 bar g (43.5 psi g)		
Design			
Enclosure			
<ul style="list-style-type: none"> Body construction Lid construction Cable inlet 	PBT (Polybutylene Terephthalate) PEI (Polyether Imide) 2 x M20x1.5 or 2 x 1/2" NPT with adapter		
Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6, IP67, IP68		
Weight	1.97 kg (4.35 lb)		
Antenna			
<ul style="list-style-type: none"> Material Dimensions 	Polypropylene rod, hermetically sealed construction Standard 100 mm (4 inch) shield for maximum 100 mm (4 inch) nozzle or optional 250 mm (10 inch) long shield		
Process connections	1 1/2" NPT [(Taper), ANSI/ASME B1.20.1] R 1 1/2" [(BSPT), EN 10226] G 1 1/2" [(BSPP), EN ISO 228-1]		

Level Measurement

Continuous level measurement – Radar transmitters


SITRANS Probe LR

Selection and Ordering data	Article No.
SITRANS Probe LR 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage vessels with nominal pressure and temperature, to a range of 20 m (66 ft). Max. 3 bar g (43.5 psi g) pressure and 80 °C (176 °F) ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML5430-
Enclosure/Cable inlet Plastic, (PBT), 2 x 1/2" NPT Plastic, (PBT), 2 x M20x1.5	1 2
Antenna type/Material - (max. 3 bar and 80 °C) Polypropylene Antenna 1 1/2" NPT [(Taper), ANSI/ASME B1.20.1], comes with integral 100 mm shield R 1 1/2" [(BSPT), EN 10226], comes with integral 100 mm shield G 1 1/2" [(BSPP), EN ISO 228-1], comes with integral 100 mm shield 1 1/2" NPT [(Taper), ANSI/ASME B1.20.1], comes with integral 250 mm shield R 1 1/2" [(BSPT), EN 10226], comes with integral 250 mm shield G 1 1/2" [(BSPP), EN ISO 228-1], comes with integral 250 mm shield	A B C D E F
Approvals General Purpose, CE, R&TTE, RCM General Purpose, CSA _{US/C} , FM, FCC CSA Class I, Div. 1, Groups A, B, C, D, Class II, Div. 1 Group G, Class III, FCC, Intrinsically Safe FM, Class I, II and III, Div. 1, Groups A, B, C, D, E, F, G, FCC, Intrinsically Safe IECEx Ex ia IIC T4; ATEX II 1G EEx ia IIC T4, R&TTE, RCM, Intrinsically Safe; INMETRO Ex ia IIC T4 Ga; GOST-R	A B C D E
Communication/Output 4 ... 20 mA, HART	1

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Selection and Ordering data	Order code
Further designs Please add "-Z" to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: ◆ Y15 Measuring-point number/identification (max. 27 characters) specify in plain text Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 ◆ C11	
Operating Instructions English French Spanish German Note: The Operating Instructions should be ordered as a separate item on the order. This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	Article No. A5E32337711 7ML1998-5HR11 7ML1998-5HR21 A5E34957879
Additional Operating Instructions Multi-language Quick Start manual	A5E32106153
Accessories Handheld programmer, Intrinsically Safe, ATEX II 1G, Ex ia HART modem/USB (for use with a PC and SIMATIC PDM) One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F) SITRANS RD100, loop powered display - see Chapter 7 SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7 For applicable back up point level switch - see point level measurement section	7ML5830-2AH 7MF4997-1DB 7ML1930-1AP 7ML5741-... 7ML5740-... 7ML5744-... 7ML5750-...
Spare parts Plastic lid For applicable back up point level switch - see point level measurement section ◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.	7ML1830-1KB

Dimensional drawings

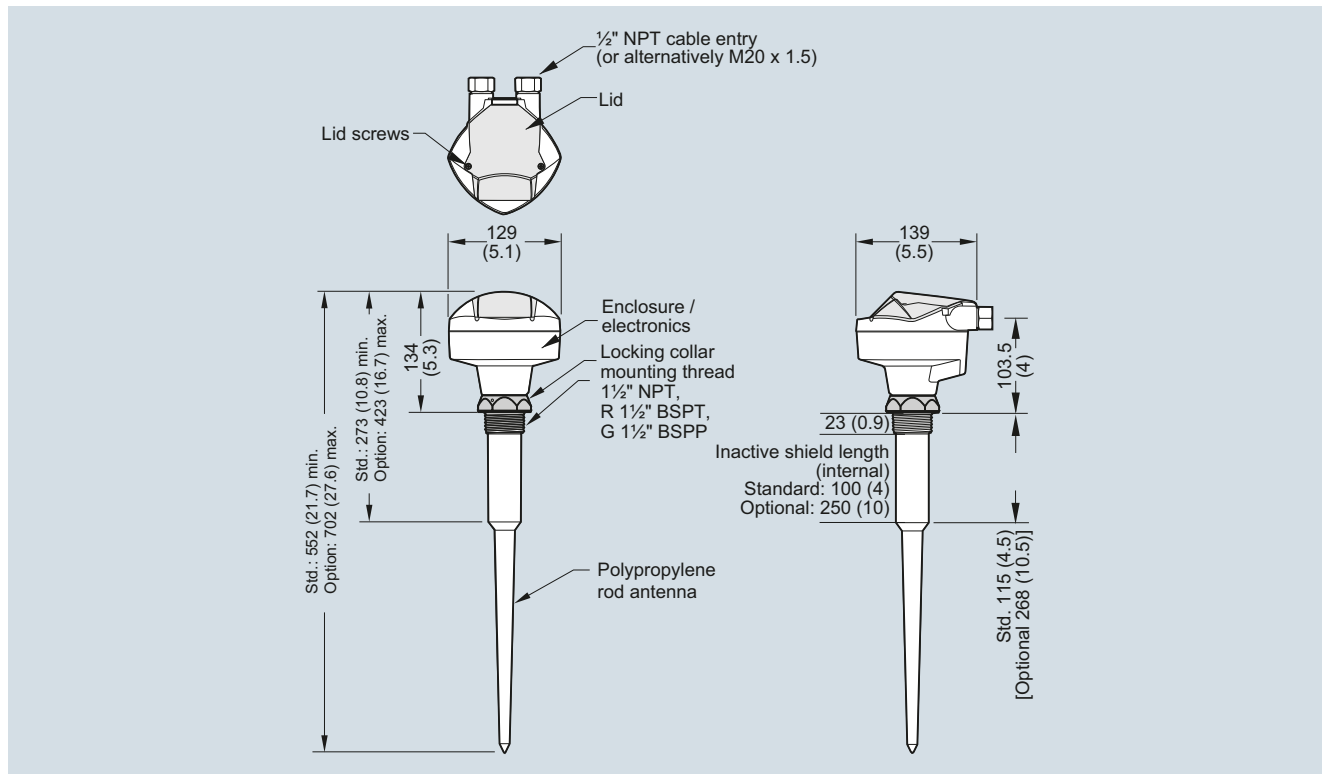

SITRANS Probe LR, dimensions in mm (inch)

Schematics

Strain relief (or NPT cable inlet)

Connect the wires to the terminals as shown: the polarity is identified on the terminal block.

Hand Programmer

SIEMENS			
1	2	3	4
5 mA	6 ↓	7 ↑	8 ↺
9	0	P...	P...
C	▲%	≡	⏏
▲	▼	↺	↻

SITRANS Probe LR
Part number: 7ML5830-2AH

Notes:

- DC terminal shall be supplied from an SELV source in accordance with IEC-1010-1 Annex H.
- All field wiring must have insulation suitable for rated input voltages.
- Use shielded twisted pair cable (14-22 AWG)
- Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS Probe LR connections